


**ALTERNATIVE DETAIL**

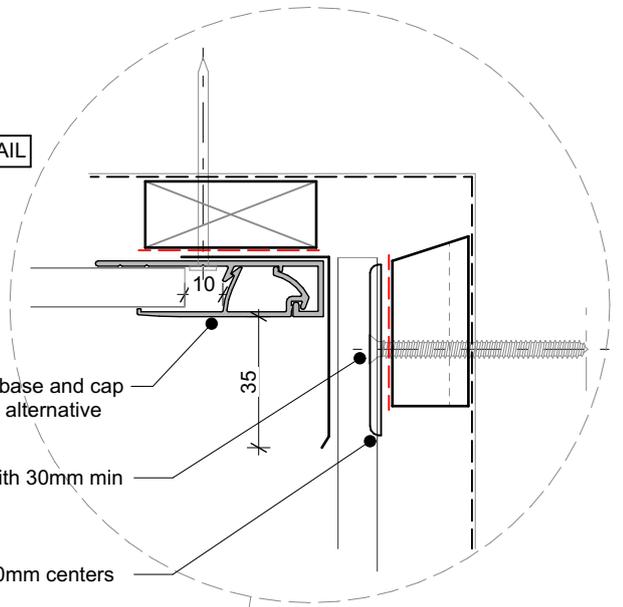

**NC247T + NC248**  
Termination flashing base and cap with back flashing as alternative

**NC204**  
10g ss csk screws with 30mm min embedment

**NC203E**  
Fixing bracket @ 600mm centers

Flexible flashing tape over flashing upstand

Single castellated timber batten  
\*See note

2.8x50mm hot dipped galvanised clout nails in to framing. Staggered @ 300centers. (SS for Exposure Zone D)

Lower edge of timber batten to be higher than Nu-Wall base channel (NC134P)

Nu-Wall Fascia - can match wall cladding

**MCK 35361**  
Head flashing fitted as cavity closure (No standard cavity closure required)

**NC134P**  
Pre-slotted base channel. Providing 2000mm<sup>2</sup> of ventilation per linear meter

10mm drip edge  
3-5mm gap

**NC107 + NC109**  
NC107 & NC109 assembly

Last batten to be positioned to underside of soffit board

**NC226**  
Impervious barrier between batten & cladding

Drained and vented cavity as per E2/AS1

**General note:**

- Cladding fixings omitted for clarity

**Cavity batten note:**

- 20mm single castellated timber battens required for all Nu-Wall installations.
- Batten to have 15° slope for moisture egress
- Allow 6mm gap between vertical and horizontal battens
- Sill and head battens to be max. 500mm with a 6mm gap to each segment
- 18mm single castellated battens are available from Nu Wall for all vertical applications to wall junctions and jambs
- Proprietary Nu-Wall Alibat is available as an alternative when a structural non-combustable cavity batten is required



Nu-Wall cladding vertical on cavity  
Typical Nu-Wall to fascia - soffit - wall (with alternative)

NW-VOC-031.03

Drawn by: Nu-Wall	Date: 25/02/2025
Checked by: RL, GT	Scale: 1:2 @ A4

© 2021 copyright in this document is the property of Nu-Wall Aluminium Cladding Limited. All rights reserved. Nu-Wall is a registered trademark of Aluminium Product Brands NZ Limited