


**NC204**

10g ss csk screws with 30mm min embedment

**NC203E**

Fixing bracket @ 600mm centers

Wall underlay

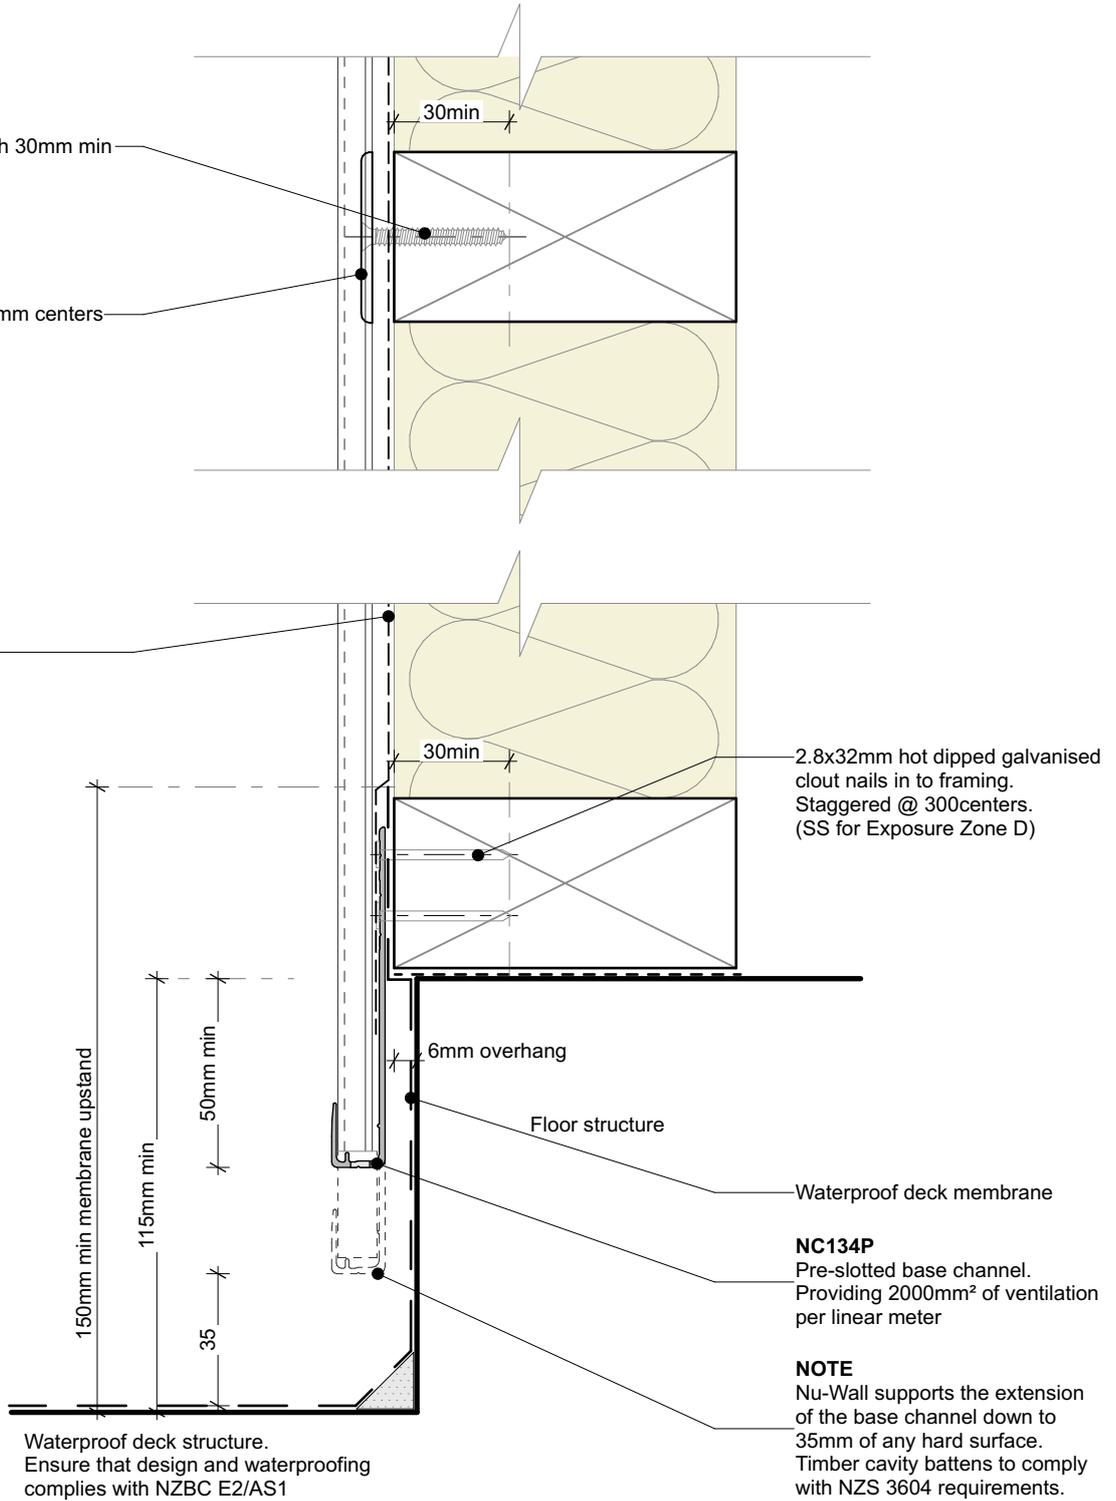

Waterproof deck structure.  
Ensure that design and waterproofing  
complies with NZBC E2/AS1

2.8x32mm hot dipped galvanised  
clout nails in to framing.  
Staggered @ 300centers.  
(SS for Exposure Zone D)

**NC134P**  
Pre-slotted base channel.  
Providing 2000mm<sup>2</sup> of ventilation  
per linear meter

**NOTE**  
Nu-Wall supports the extension  
of the base channel down to  
35mm of any hard surface.  
Timber cavity battens to comply  
with NZS 3604 requirements.

**Note:**

- Standard fixing specification. May vary depending on wind load



Nu-Wall cladding vertical direct fix  
Typical base channel over waterproof deck

NW-VDF-004.02

Drawn by: Nu-Wall      Date: 25/02/2025

Checked by: RL, GT      Scale: 1:2 @ A4

© 2021 copyright in this document is the property of Nu-Wall Aluminium Cladding Limited. All rights reserved. Nu-Wall is a registered trademark of Aluminium Product Brands NZ Limited