


2.8x32mm hot dipped galvanised clout nails @ 600 centers. (SS for Exposure Zone D)


NC 220
15x15mm closed-cell foam insert

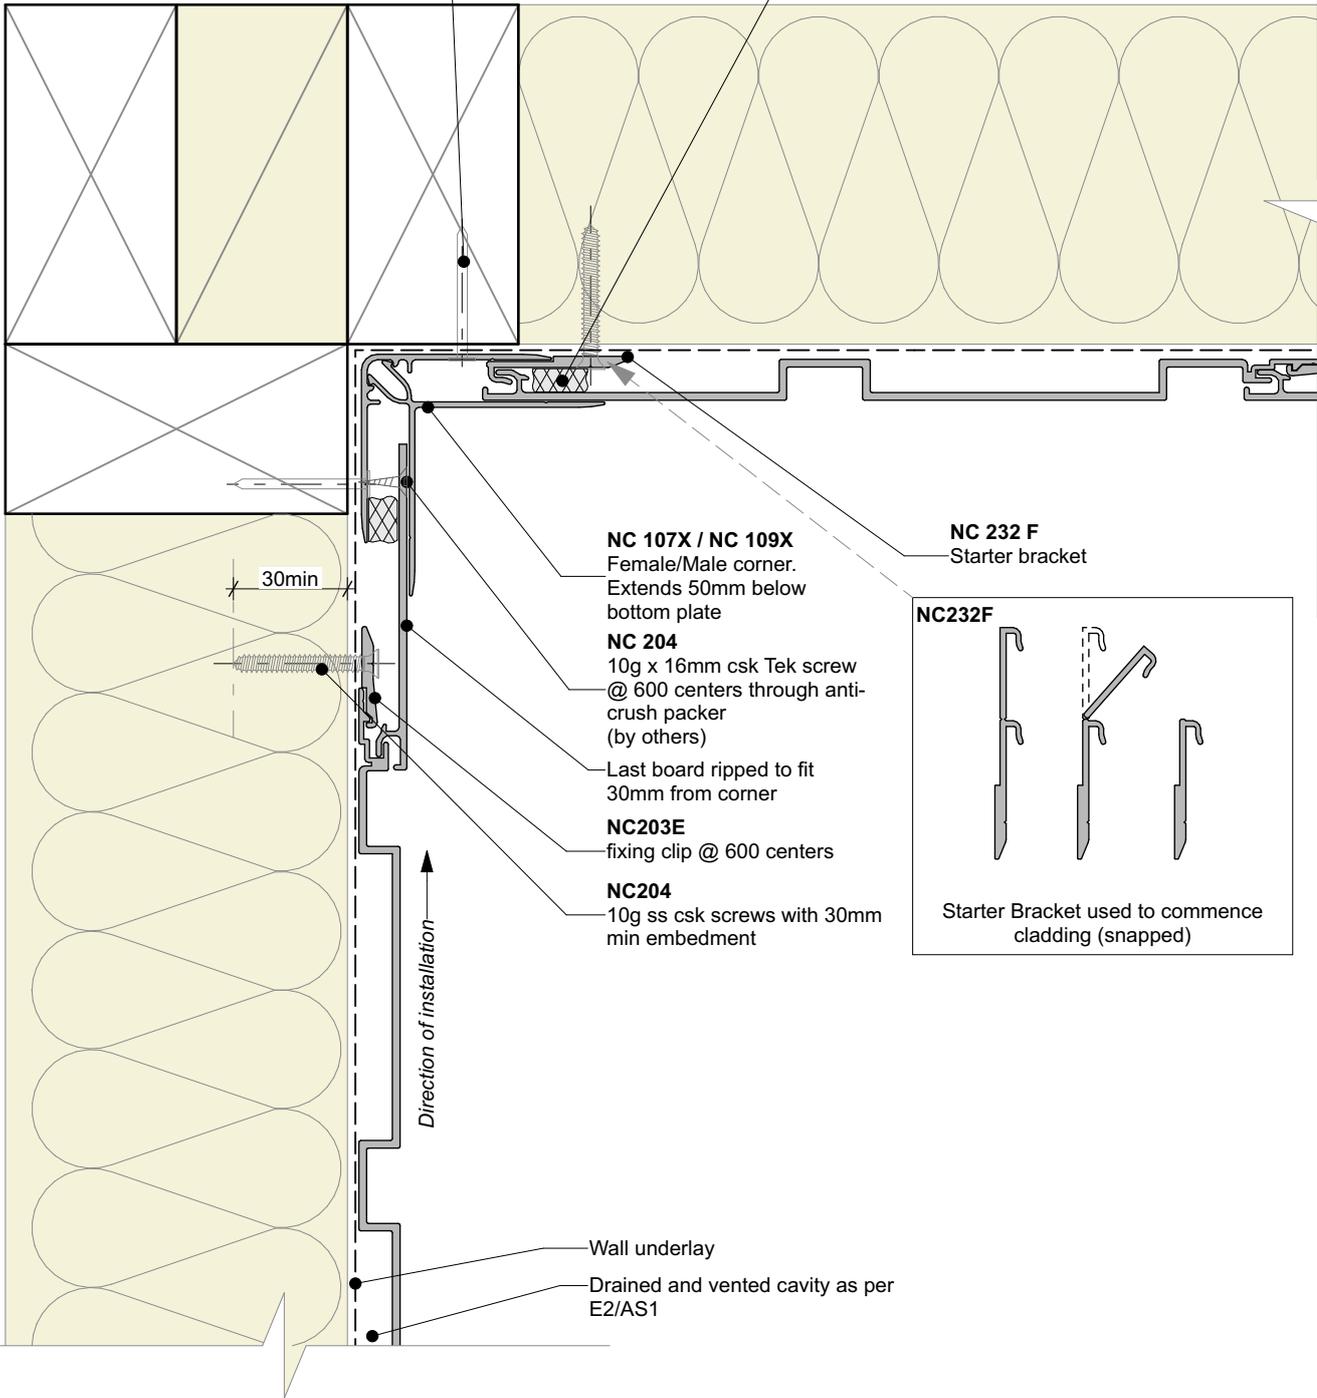

NC 107X / NC 109X
Female/Male corner.
Extends 50mm below bottom plate

NC 232 F
Starter bracket

NC 204
10g x 16mm csk Tek screw @ 600 centers through anti-crush packer (by others)

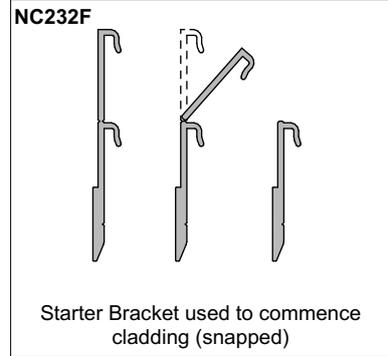

Last board ripped to fit 30mm from corner

NC203E
fixing clip @ 600 centers

NC204
10g ss csk screws with 30mm min embedment

Starter Bracket used to commence cladding (snapped)

Wall underlay

Drained and vented cavity as per E2/AS1



Nu-Wall cladding vertical direct fix
Internal 90 deg corner using NC107X and NC109X

NW-VDF-008.02

© 2021 copyright in this document is the property of Nu-Wall Aluminium Cladding Limited. All rights reserved. Nu-Wall is a registered trademark of Aluminium Product Brands NZ Limited

Drawn by: Nu-Wall	Date: 25/02/2025
Checked by: RL, GT	Scale: 1:2 @ A4